

Neo-Life

FL-70W-100W-150W-240W

Eigenschaften:

- ◆ Hochenergieeffizient -> bis zu 110 lm/w
- ◆ Superhell Hoher Lichtstrom -> bis zu 27500 lm
- ◆ IP65, Rostfrei, Spritzwasser- und Staubschutz
- ◆ Breite Abstrahlwinkel. 120 ° Abstrahlwinkel, um einen großen Beleuchtungsbereich zu bieten. Frei von Schatten
- ◆ Schwenkbar. Bei Joch-Stil in jedem Winkel positionieren.
- ◆ Verschiedene Abdeckungen vorhanden: Klarglas

Anwendungsbeispiele:

Ideal für Ambiente Beleuchtung wie für Bürogebäude, Hotel, Werbetafeln, Schaufenster, Gärten, Terrasse, Hof, Rasen, Lager, Werkstatt, Billboard, Museum und Nutzung als Sicherheitsbeleuchtung und vieles mehr..



Flexible Installation

Mit dem Metallhalterung kann die Lampe an der Decke, an der Wand montiert oder am Boden montiert werden.



Technische Daten:

FL-70W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.37A	DC42V	1.5A	70W	>0.95	
LED Type	LED Q'ty	CRI	CCT	3000-3500K	4000-4500K	5500-6000K
			Luminous efficiency	100LM/W	105LM/W	110LM/W
			Luminous flux	7000LM	7350LM	7700LM
			Beam Angle	120°		
SMD3030	77PCS	>80Ra				
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
30.000Hours	CE,RoHS	IP65	Class I	300*290*83MM	3.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	360*345*140MM	4.2Kg	
Outer carton package	5PCS/carton,K=K corrugated paper, L740*W385*H375mm,GW:22KG					

FL-100W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.53A	DC42V	2.15A	100W	>0.95	
LED Type	LED Q'ty	CRI	CCT	3000-3500K	4000-4500K	5500-6000K
			Luminous efficiency	100LM/W	105LM/W	110LM/W
			Luminous flux	10000LM	10500LM	11000LM
			Beam Angle	120°		
SMD3030	105PCS	>80Ra				
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
30.000Hours	CE,RoHS	IP65	Class I	300*290*83MM	3.5Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	360*345*140MM	4.2Kg	
Outer carton package	5PCS/carton,K=K corrugated paper, L740*W385*H375mm,GW:22KG					



FL-150W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	0.8A	DC42V	3.13A	150W	>0.95	
LED Type	LED Q'ty	CRI	CCT	3000-3500K	4000-4500K	5500-6000K
			Luminous efficiency	100LM/W	105LM/W	110LM/W
			Luminous flux	15000LM	15750LM	16500LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
30.000Hours	CE,RoHS	IP65	Class I	334*314*89MM	5.1Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	390*380*155MM	6Kg	
Outer carton package	3PCS/carton,K=K corrugated paper, L410*W400*H500mm,GW:18KG					




FL-200W







Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.05A	DC48V	3.75A	200W	>0.95	
LED Type	LED Q'ty	CRI	CCT	2800-3200K	4000-4500K	5000-5500K
			Luminous efficiency	100LM/W	105LM/W	110LM/W
			Luminous flux	5000LM	5250LM	5500LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
30.000Hours	CE,RoHS	IP65	Class I	372*372*122MM	7.25Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	430*430*183MM	8Kg	
Outer carton package	3PCS/carton,K=K corrugated paper, L450*W450*H590mm,GW:24KG					

FL-250W

Input Voltage	Max.Current	Operating Voltage	Constant Current	Power Consumption	Power Factor	
AC200-240V	1.32A	DC48V	4.7A	250W	>0.95	
LED Type	LED Q'ty	CRI	CCT	3000-3500K	4000-4500K	5500-6000K
			Luminous efficiency	100LM/W	105LM/W	110LM/W
SMD3030	256PCS	>80Ra	Luminous flux	25000LM	26250LM	27500LM
			Beam Angle	120°		
Life Time	Certifications	IP Code	Luminaires Class	product dimension	N.W	
30.000Hours	CE,RoHS	IP65	Class I	433*386*122MM	9.45Kg	
Operating Temperature	Storage Temperature	Humidity Operating	Humidity Storage	Packing dimension	G.W	
-20°Cto+50°C	-30°Cto+60°C	10-80%RH	10-90%RH	490*440*183MM	10.5Kg	
Outer carton package	2PCS/carton,K=K corrugated paper, 510*W460*H400mm,GW:22.5KG					

Abmessungen:

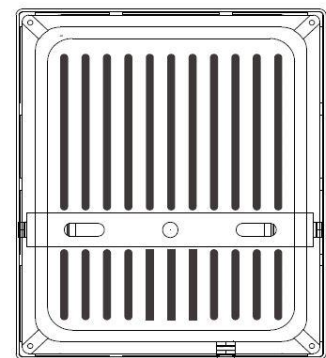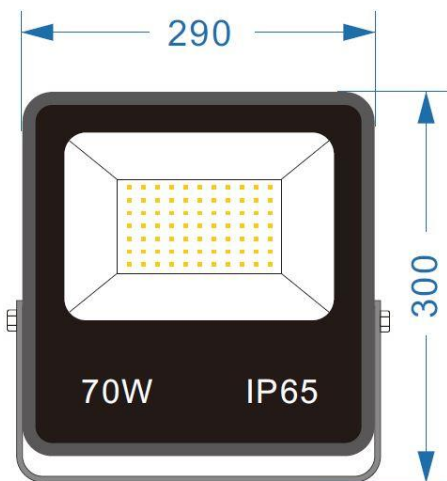

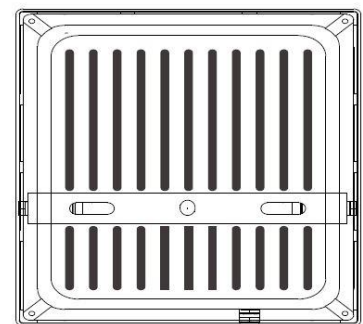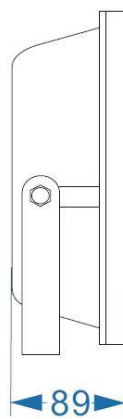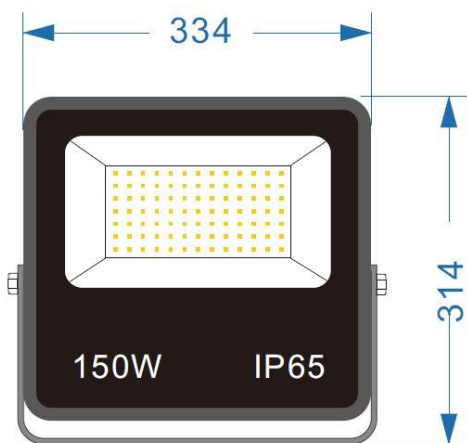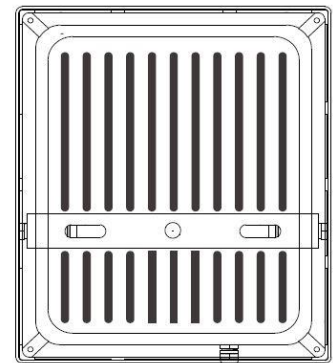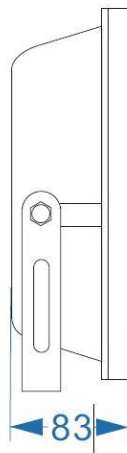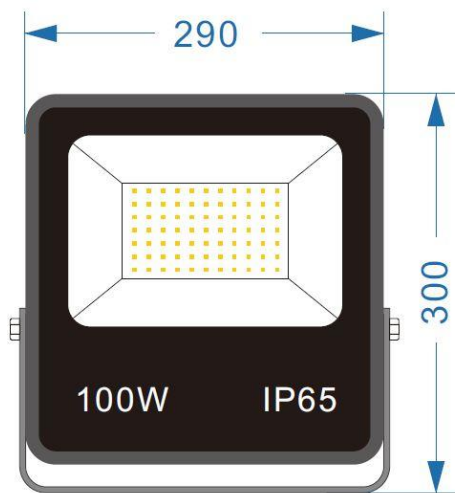

Neo-Life

